




Open a thumbscrew under the VESA-mount and detach it.



Place the AIO-computer screen side down on a soft surface. Align the VESA-mount with the screw holes.

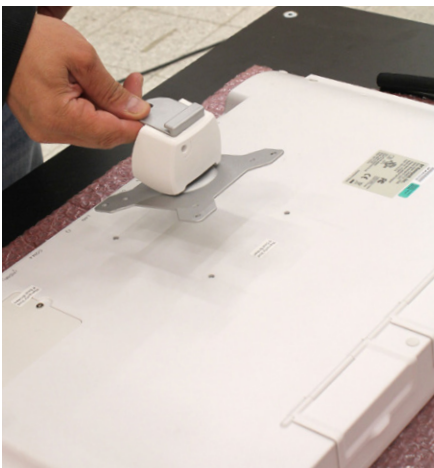

Tighten the VESA-mount with four screws.





Lift the AIO-computer into place on the monitor bracket.



Screw the thumbscrew you removed at the beginning back into place.



Connect the keyboard and mouse cables to the USB connectors on the bottom of the AIO computer and thread the extra wires through the cover.

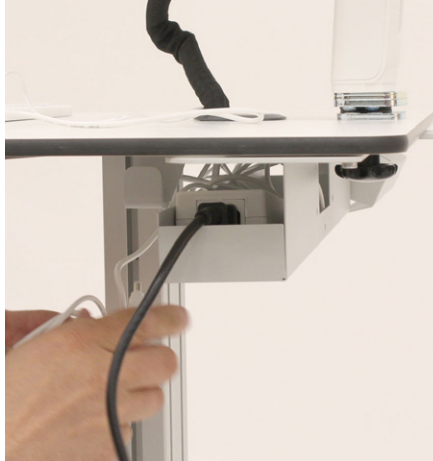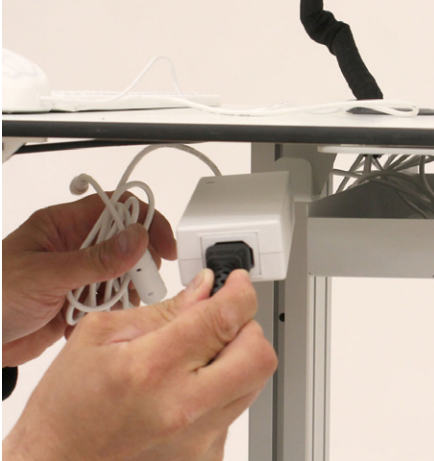

Place the transformer in the box under the cover.



Wrap the cable shield around the wires.



All done!